

KARACHI WATER & SEWERAGE BOARD

OFFICE OF THE EXECUTIVE ENGINEER

KARACHI DIVISION CIVIL-I

B.O.Q

SUBJECT:- REPAIR & MAINTENANCE OF QUARTER NO.E-1,
SYPHONE-20".

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words.		
1.	P/L 1" thick topping cement (on ratio (1:2:4) including surface finishing and drawing into panels 1 1/2" thick.	1174.75 Sft			% Sft	
2.	Cement plaster 1:4 upto 12' height 3/8" thick.	890 Sft			% Sft	
3.	P/F in position Door, Windows and ventilators 2 x 2 1/4" Angle iron prime thick commercial ply wood veneer shutter of deodar (3 ply) on both side, including hole fasten, cheats iron trench bolt handle hinges and one mortise etc.	117.50 Sft			P/Sft	
4.	L/F of approved coloured glazed tiles 1/2" laid in white cement and pigment on a bed of 3/4" thick cement mortar 1:2.	84 Sft			P/Sft	
5.	Glazed tiles dedor 1/4" thick laid in pigment over 1:2 cement sand mortar 3/4" thick including finishing.	321.76 Sft			% Sft	
6.	P/F Deodar wooden wardrobe including boxing with back slides shelter and brass finishing such as handle lock arrangement hinges rod shos and mirror . measuring 2'x1"(batch as per approved design.	36.25 Sft			P/Sft	
7.	Making & Fixing steel grated door with 1 1/6" thick sheeting including angle iron frame 2"x2" and 3/4" square bars 4" centre to centre with locking arrangement.	84 Sft			P/Sft	
8.	Distemping two coats.	3031 Sft			% Sft	
9.	Scraping, brushing and removing old paint frame metal surface painting door windows any type.	618 Sft			% Sft	
10.	P/L (main or sub main) PVC insulate with size (2,7/29) copper conduit in 3/4" dia PVC conduit on surface.	200 Mtr.			P/Mtr.	

S.NO.	DESCRIPTION	QTY.	RATE		PER UNIT / ITEM	AMOUNT IN RUPEES
			Rupees in Figures.	Rupees in Words.		
11.	P/L (main or sub main) PVC insulated with size (2, 7/044) 6 mm ² copper conduit in 1" dia PVC conduit on surface.	150 Mtr.			P/Mtr.	
12.	Wiring for light fan points with (3/29) PVC conduit accessed in the wall or column as sequence.	25 Points.			P/Points.	
13.	P/F Brass Ceiling fan 48" good quality.	06 Nos.			Each	
	TOTAL					


**EXECUTIVE ENGINEER
KARACHI DIVISION CIVIL-I
K.W.&S.B.**

I / We hereby quoted the cost of Rs. _____
for execution of the above work and I / We hereby undertaking
to accept all clauses of SPPR-2010.

Signature of Contractor
With Name of Firm & Seal

Address: _____

1. Tender's received in Sealed Cover (Y/N) and opened by Procurement Committee-I.
2. No cutting and overwriting found.
3. Pay Order No. _____ drawn Bank
dated: _____
4. Quoted Amount Rs. _____
(words _____
After rebate if any.

Accounts Officer (BT), KW&SB

Superintending Engineer, KMC

Add. Director(LA), KMC

Chief Engineer (BT)
K.W.&S.B.

Chief Engineer (IP&D)
K.W.&S.B.

NOTE SHEET

(Page 35)

SUBJECT: REPAIR & MAINTENANCE WORK OF QUARTER NO. E-1, SYPHON 20.

13

It is submitted that the resident of quarter No. E-1 of Syphon 20 Staff Colony has requested for repair & maintenance of his quarter due to very deteriorated condition to C.E(B.T), C.E(B.T) directed "Putup estimate".

14

The Sub Engineer & Assistant Executive Engineer concerned inspected the site of work and found that the following items of work i.e. topping, cement plaster 1:4, deodar wood, glazed tiles, wood wardrobe, steel gate, distemping, old surface, wiring for all type ceiling fan-etc complete, so that the estimate prepared amounting to Rs.8,11,321/- and Dir(Design) has been checked for Rs.7,96,002/- as per para 7/N.

15


Sufficient fund is available under H/A No.6083-24 of the printed budget estimate 2014-15 to meet the expenditure.

16

In view of the above, it is therefore, requested that administrative approval for calling tender through website as per SPPR-2010 may please be obtained from M.D., KWSB.

17

Submitted please.


Executive Engineer,
K.D(C-1), KWSB.

18

The S.E(B/WSC), KWSB/CE(BT)

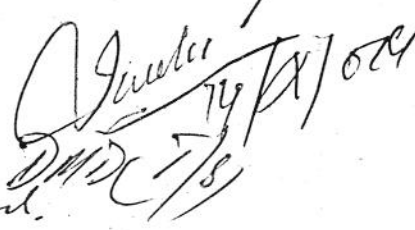
Submitted for necessary approval from
M.D KWSB please.

19) DMD (TS)

For obtaining necessary administrative approval of M.D (W&S) as requested at para 18) N, please.

M.D (W&S)

As per


DMD (TS)
14/11/2014

DMD (TS)


DMD (TS)